

Feature

- ◊ High Speed Power Switching
- ◊ Enhanced Body diode dv/dt capability
- ◊ Enhanced Avalanche Ruggedness
- ◊ 100% UIS Tested, 100% Rg Tested
- ◊ Lead Free


200V N-Ch Power MOSFET

V_{DS}	200	V
$R_{DS(on),typ}$	28	$m\Omega$
I_D	50	A

Application

- ◊ Synchronous Rectification in SMPS
- ◊ Hard Switching and High Speed Circuit
- ◊ Power Tools
- ◊ UPS
- ◊ Motor Control

Part Number	Package	Marking
HGD320N20S	TO-252	GD320N20S

TO-252

Absolute Maximum Ratings at $T_i=25^\circ C$ (unless otherwise specified)

Parameter	Symbol	Conditions	Value	Unit
Continuous Drain Current	I_D	$T_C=25^\circ C$	50	A
		$T_C=100^\circ C$	35	
Drain to Source Voltage	V_{DS}	-	200	V
Gate to Source Voltage	V_{GS}	-	± 20	V
Pulsed Drain Current	I_{DM}	-	150	A
Avalanche Energy, Single Pulse	E_{AS}	$L=0.4mH, T_C=25^\circ C$	180	mJ
Power Dissipation	P_D	$T_C=25^\circ C$	200	W
Operating and Storage Temperature	T_J, T_{stg}	-	-55 to 175	°C

Absolute Maximum Ratings

Parameter	Symbol	Max	Unit
Thermal Resistance Junction-Case	$R_{\theta JC}$	0.75	°C/W
Thermal Resistance Junction-Ambient	$R_{\theta JA}$	50	°C/W

Electrical Characteristics at $T_j=25^\circ\text{C}$ (unless otherwise specified)
Static Characteristics

Parameter	Symbol	Conditions	Value			Unit
			min	typ	max	
Drain to Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}}=0\text{V}, I_D=250\mu\text{A}$	200	-	-	V
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}}=V_{\text{DS}}, I_D=250\mu\text{A}$	2	3	4	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=200\text{V}, T_j=25^\circ\text{C}$	-	-	1	μA
		$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=200\text{V}, T_j=100^\circ\text{C}$	-	-	100	
Gate to Source Leakage Current	I_{GSS}	$V_{\text{GS}}=\pm 20\text{V}, V_{\text{DS}}=0\text{V}$	-	-	± 100	nA
Drain to Source on Resistance	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}}=10\text{V}, I_D=10\text{A}$	-	28	32	$\text{m}\Omega$
Transconductance	g_{fs}	$V_{\text{DS}}=5\text{V}, I_D=10\text{A}$	-	31	-	S
Gate Resistance	R_G	$V_{\text{GS}}=0\text{V}, V_{\text{DS}} \text{ Open}, f=1\text{MHz}$	-	4.6	-	Ω

Dynamic Characteristics

Input Capacitance	C_{iss}	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=100\text{V}, f=1\text{MHz}$	-	1598	-	pF
Output Capacitance	C_{oss}		-	124	-	
Reverse Transfer Capacitance	C_{rss}		-	7.5	-	
Total Gate Charge	Q_g	$V_{\text{DD}}=100\text{V}, I_D=10\text{A}, V_{\text{GS}}=10\text{V}$	-	19	-	nC
Gate to Source Charge	Q_{gs}		-	7	-	
Gate to Drain (Miller) Charge	Q_{gd}		-	2	-	
Turn on Delay Time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}}=100\text{V}, I_D=10\text{A}, V_{\text{GS}}=10\text{V}$, $R_G=10\Omega$,	-	12	-	ns
Rise time	t_r		-	17	-	
Turn off Delay Time	$t_{\text{d}(\text{off})}$		-	23	-	
Fall Time	t_f		-	10	-	

Reverse Diode Characteristics

Diode Forward Voltage	V_{SD}	$V_{\text{GS}}=0\text{V}, I_F=10\text{A}$	-	0.9	1.2	V
Reverse Recovery Time	t_{rr}	$V_R=100\text{V}, I_F=10\text{A}, dI_F/dt=100\text{A}/\mu\text{s}$	-	90	-	ns
Reverse Recovery Charge	Q_{rr}		-	306	-	nC



HGD320N20S

P-3

Hunteck

Fig 1. Typical Output Characteristics

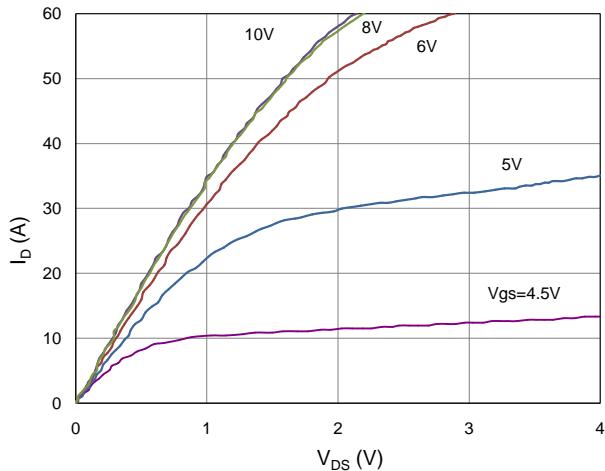


Figure 2. On-Resistance vs. Gate-Source Voltage

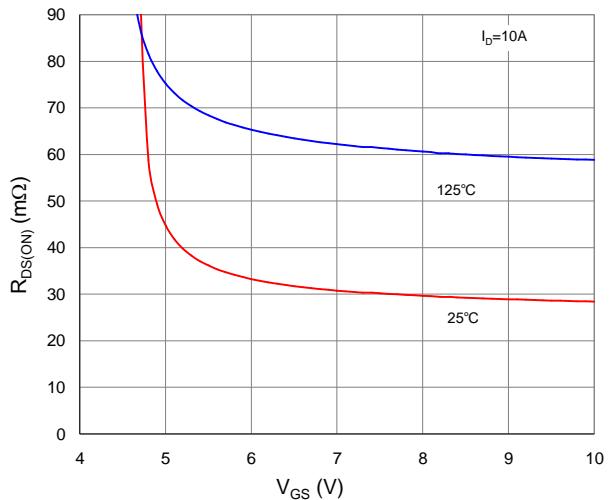


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

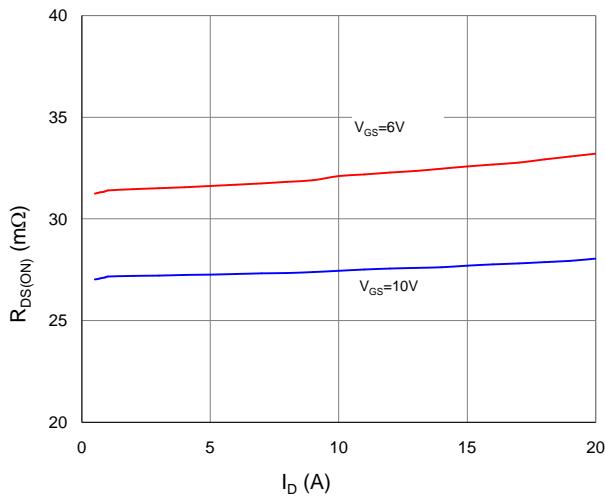


Figure 4. Normalized On-Resistance vs. Junction Temperature

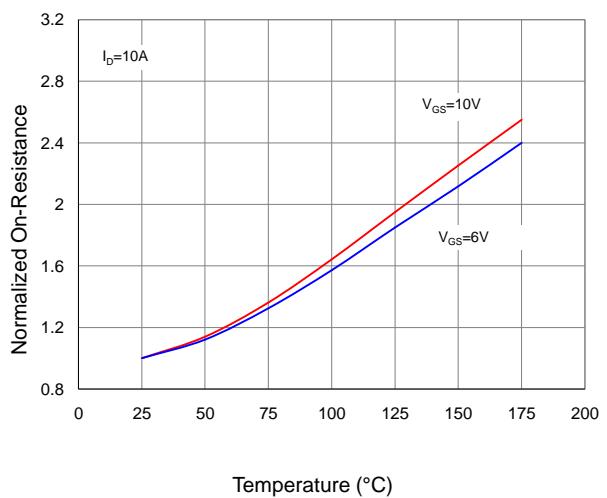


Figure 5. Typical Transfer Characteristics

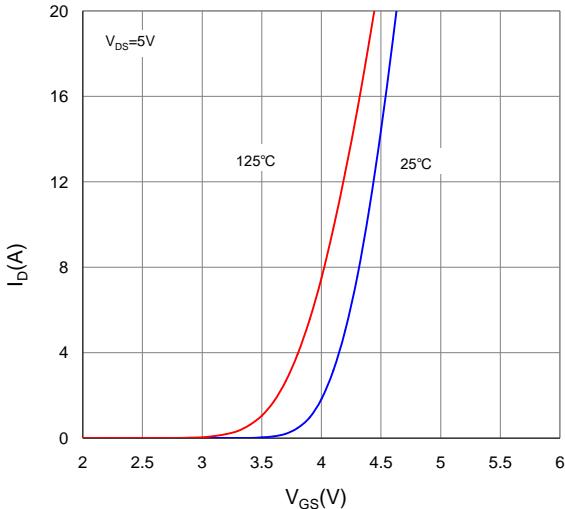


Figure 6. Typical Source-Drain Diode Forward Voltage

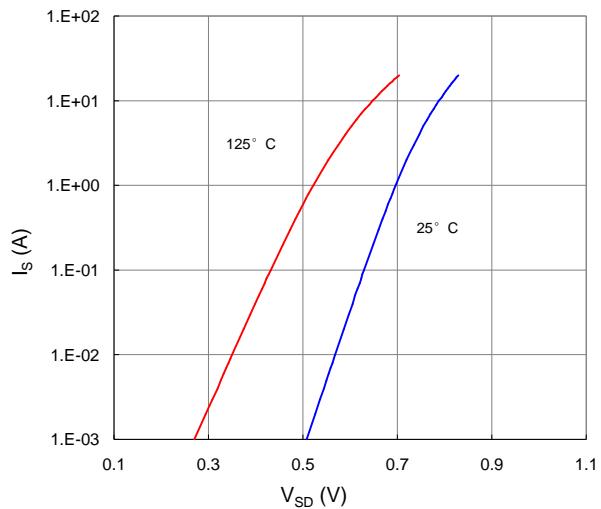




Figure 7. Typical Gate-Charge vs. Gate-to-Source Voltage

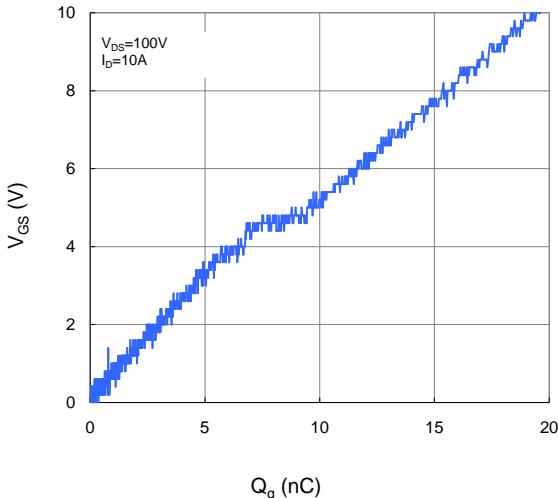


Figure 8. Typical Capacitance vs. Drain-to-Source Voltage

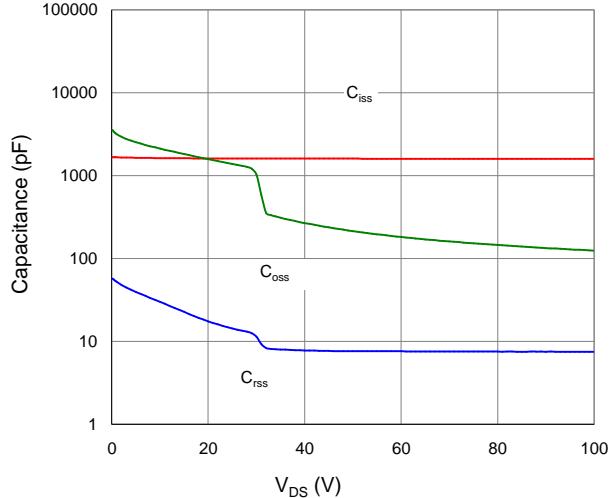


Figure 9. Maximum Safe Operating Area

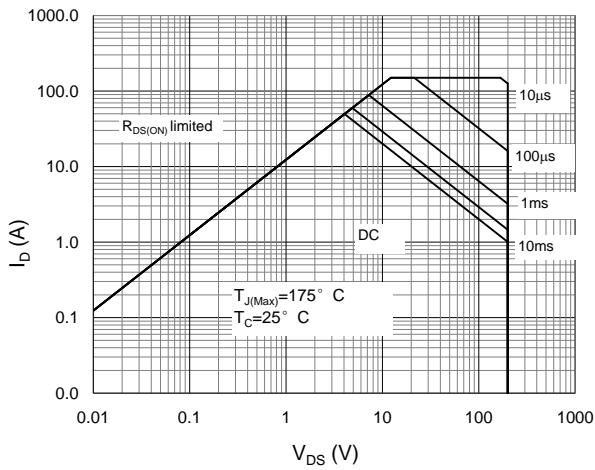


Figure 10. Maximum Drain Current vs. Case Temperature




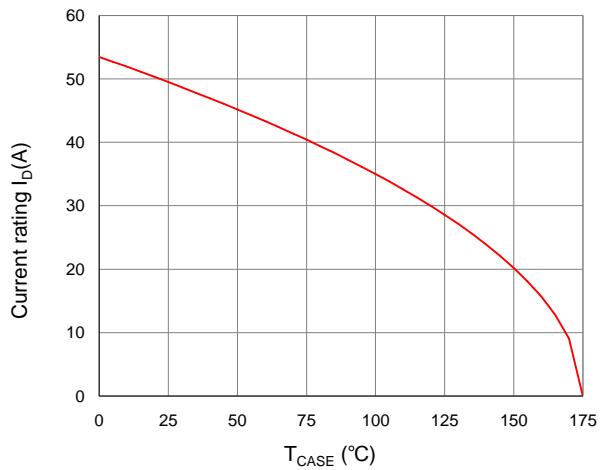


Figure 11. Normalized Maximum Transient Thermal Impedance, Junction-to-Case

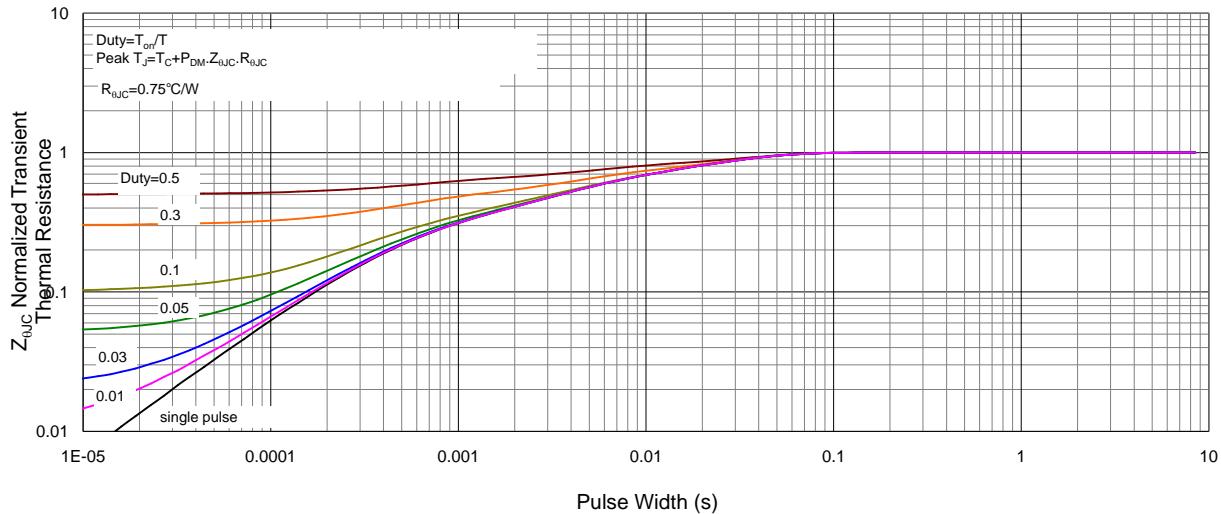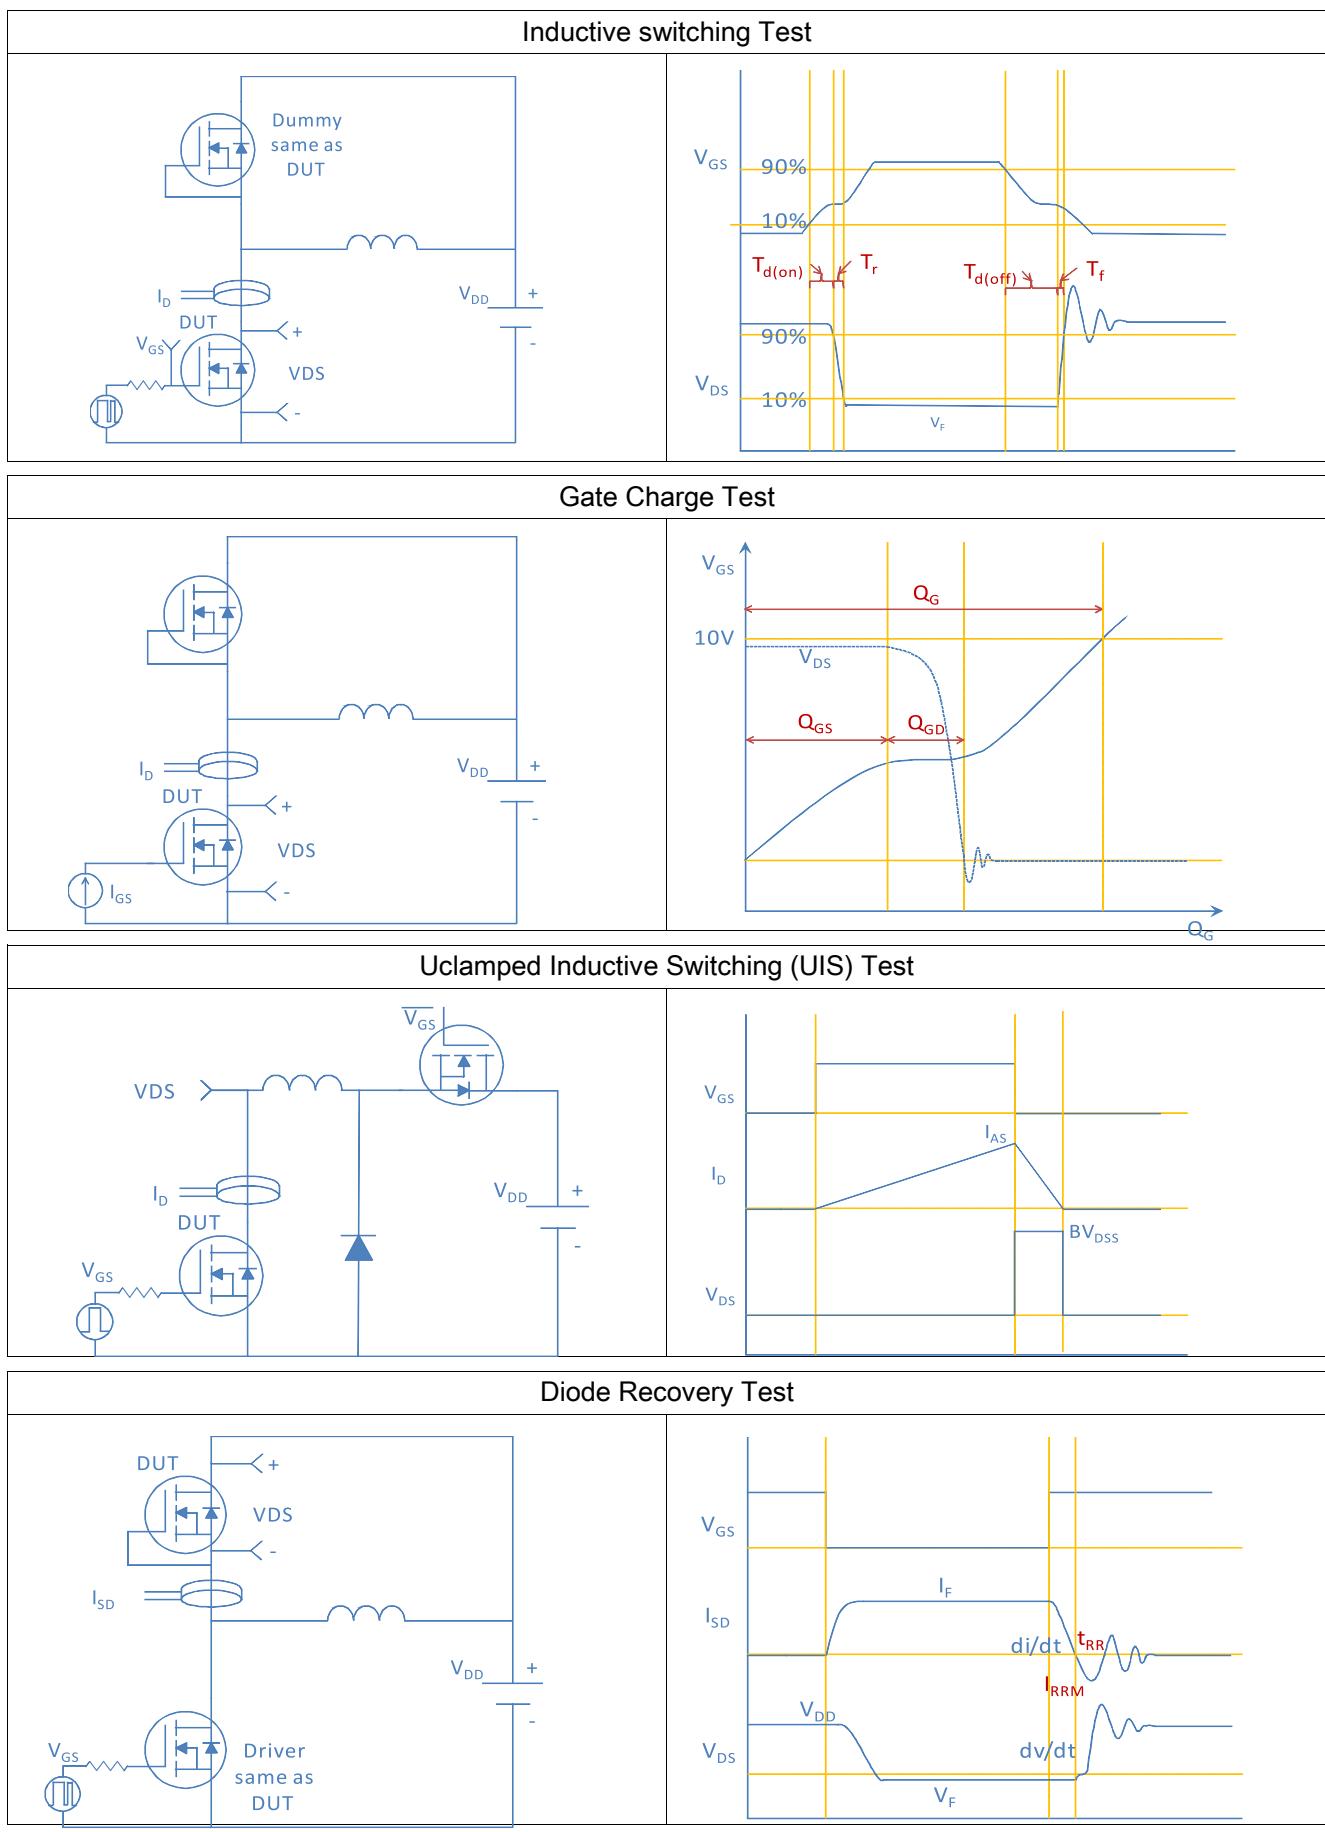

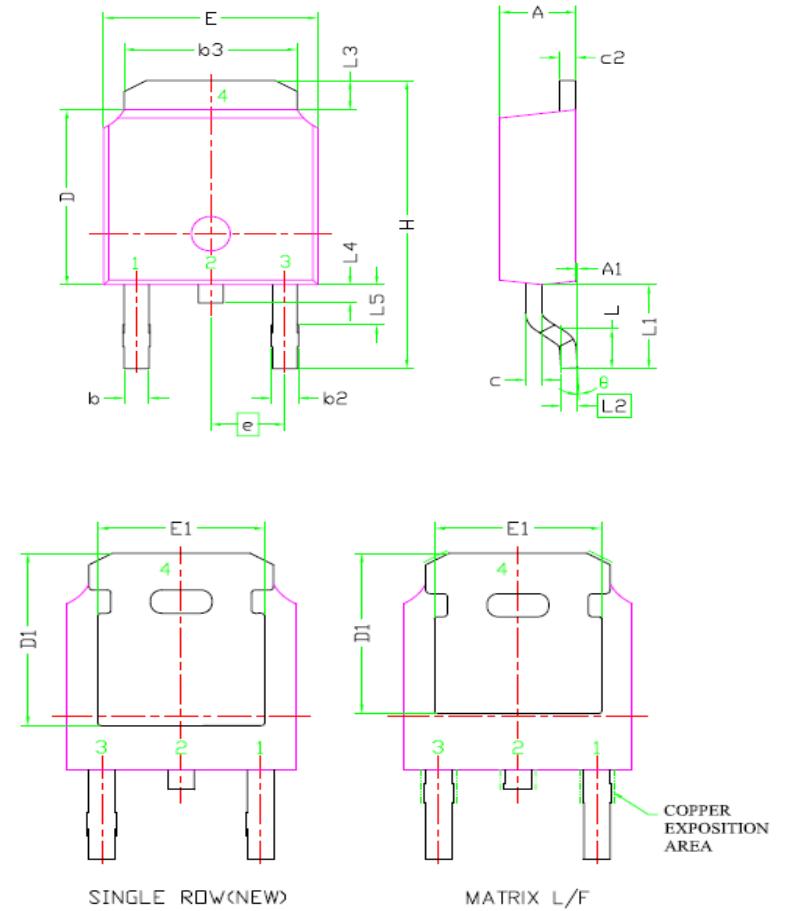

TO-252, 3 leads


SYMBOL	DIMENSIONAL REQMTS		
	MIN	NOM	MAX
E	6.40	6.60	6.731
L	1.40	1.52	1.77
L1	2.743	REF	
L2	0.508	BSC	
L3	0.89	--	1.27
L4	0.64	--	1.01
L5	--	--	--
D	6.00	6.10	6.223
H	9.40	10.00	10.40
b	0.64	0.76	0.88
b2	0.77	0.84	1.14
b3	5.21	5.34	5.46
e	2.286	BSC	
A	2.20	2.30	2.38
A1	0	--	0.127
c	0.46	0.50	0.60
c2	0.46	0.50	0.58
D1	5.21	--	--
E1	4.40	--	--
θ	0°	--	10°