

**30V N-Ch Power MOSFET**
**Feature**


- ◇ High Speed Power Switching, Logic Level
- ◇ Lead Free, Halogen Free

$V_{DS}$	30	V
$R_{DS(on),typ}$   $V_{GS}=10V$	30	$m\Omega$
$I_D$ (Silicon Limited)	5.5	A

**Application**

- ◇ Hard Switching and High Speed Circuit
- ◇ DC/DC in Telecoms and Industrial

Part Number	Package	Marking
HTO350N03	TSOP-6	1D

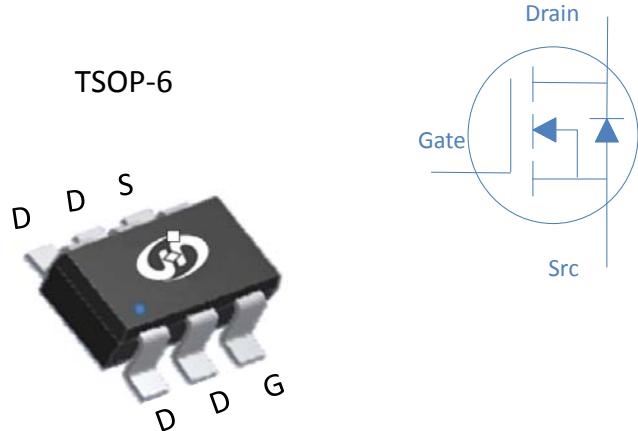
**Absolute Maximum Ratings at  $T_j=25^\circ C$  (unless otherwise specified)**

Parameter	Symbol	Conditions	Value	Unit
Continuous Drain Current (Silicon Limited)	$I_D$	$T_A=25^\circ C$	5.5	A
		$T_A=70^\circ C$	3.6	
Drain to Source Voltage	$V_{DS}$	-	30	V
Gate to Source Voltage	$V_{GS}$	-	$\pm 20$	V
Pulsed Drain Current	$I_{DM}$	-	22	A
Power Dissipation	$P_D$	$T_A=25^\circ C$	1.25	W
Operating and Storage Temperature	$T_J, T_{stg}$	-	-55 to 150	°C

**Absolute Maximum Ratings**

Parameter	Symbol	Max	Unit
Thermal Resistance Junction-Ambient	$R_{\theta JA}$	100	°C/W

**Electrical Characteristics at  $T_j=25^\circ\text{C}$  (unless otherwise specified)**
**Static Characteristics**

Parameter	Symbol	Conditions	Value			Unit
			min	typ	max	
Drain to Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}}=0\text{V}, I_D=250\mu\text{A}$	30	-	-	V
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}}=V_{\text{DS}}, I_D=250\mu\text{A}$	1.0	1.50	3.0	
Zero Gate Voltage Drain Current	$I_{\text{DSS}}$	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=24\text{V}, T_j=25^\circ\text{C}$	-	-	1	$\mu\text{A}$
		$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=20\text{V}, T_j=125^\circ\text{C}$	-	-	10	
Gate to Source Leakage Current	$I_{\text{GSS}}$	$V_{\text{GS}}=\pm 20\text{V}, V_{\text{DS}}=0\text{V}$	-	-	$\pm 100$	nA
Drain to Source on Resistance	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}}=10\text{V}, I_D=5.5\text{A}$	-	30	35	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}, I_D=4.5\text{A}$	-	40	50	
Transconductance	$g_{\text{fs}}$	$V_{\text{DS}}=5\text{V}, I_D=5.5\text{A}$	-	11	-	S

**Dynamic Characteristics**

Input Capacitance	$C_{\text{iss}}$	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=10\text{V}, f=1\text{MHz}$	-	323	-	pF
Output Capacitance	$C_{\text{oss}}$		-	75	-	
Reverse Transfer Capacitance	$C_{\text{rss}}$		-	53	-	
Total Gate Charge	$Q_g(10\text{V})$	$V_{\text{DD}}=10\text{V}, I_D=5.5\text{A}, V_{\text{GS}}=10\text{V}$	-	7.1	-	nC
Gate to Source Charge	$Q_{\text{gs}}$		-	1.1	-	
Gate to Drain (Miller) Charge	$Q_{\text{gd}}$		-	2.2	-	
Turn on Delay Time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}}=15\text{V}, I_D=1\text{A}, V_{\text{GS}}=10\text{V}, R_G=6\Omega,$	-	8	-	ns
Rise time	$t_r$		-	12	-	
Turn off Delay Time	$t_{\text{d}(\text{off})}$		-	28	-	
Fall Time	$t_f$		-	15	-	

**Reverse Diode Characteristics**

Diode Forward Voltage	$V_{\text{SD}}$	$V_{\text{GS}}=0\text{V}, I_F=2\text{A}$	-	1.2	V
-----------------------	-----------------	--	---	-----	---

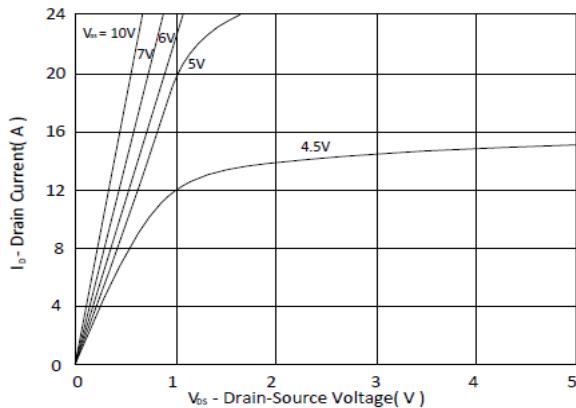
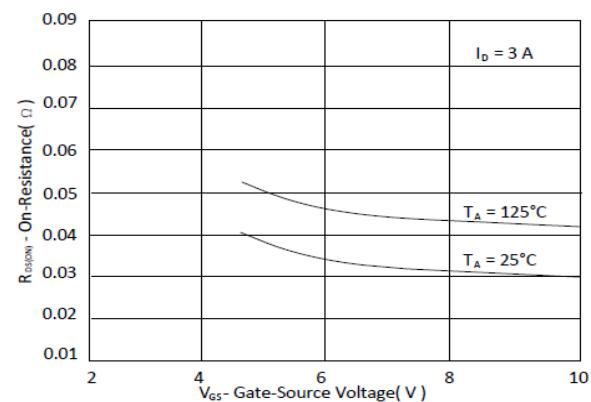
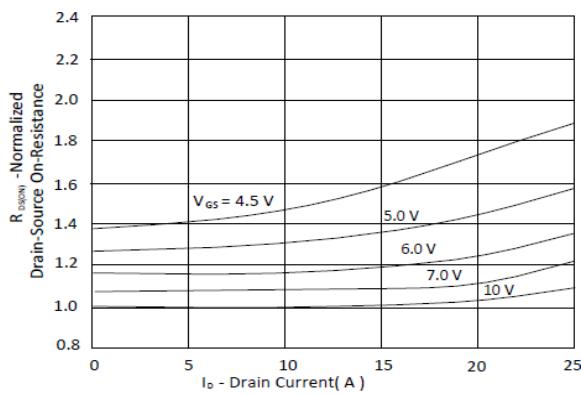
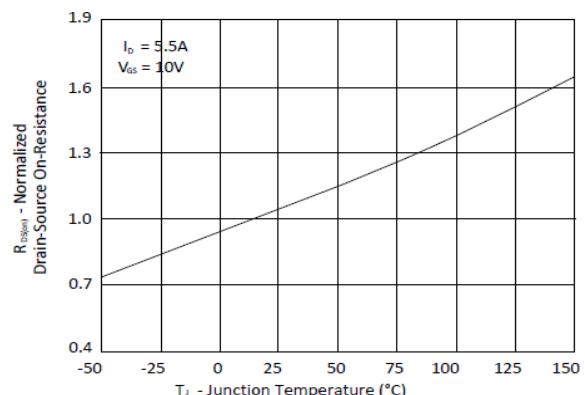
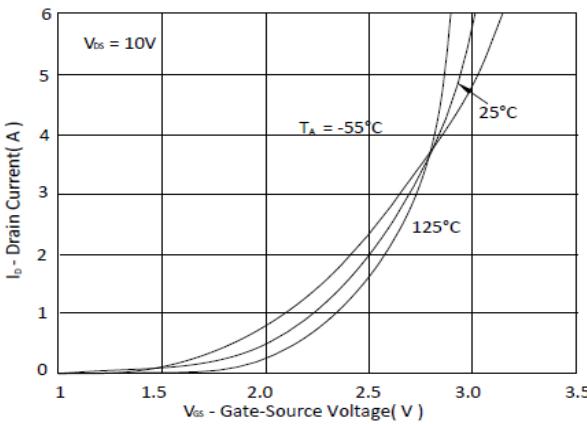
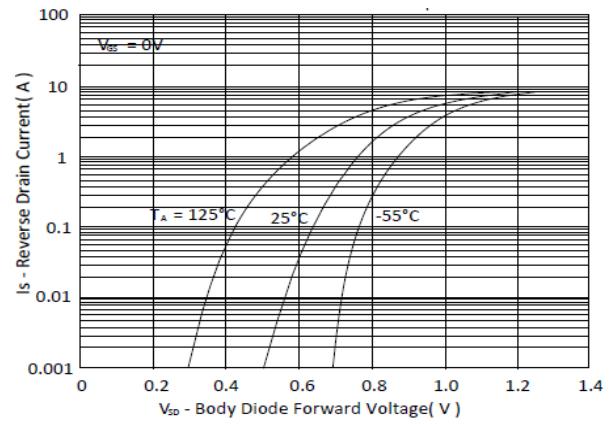
**Fig 1. Typical Output Characteristics**

**Figure 2. On-Resistance vs. Gate-Source Voltage**

**Figure 3. On-Resistance vs. Drain Current and Gate Voltage**

**Figure 4. Normalized On-Resistance vs. Junction Temperature**

**Figure 5. Typical Transfer Characteristics**

**Figure 6. Typical Source-Drain Diode Forward Voltage**


Figure 7. Typical Gate-Charge vs. Gate-to-Source Voltage

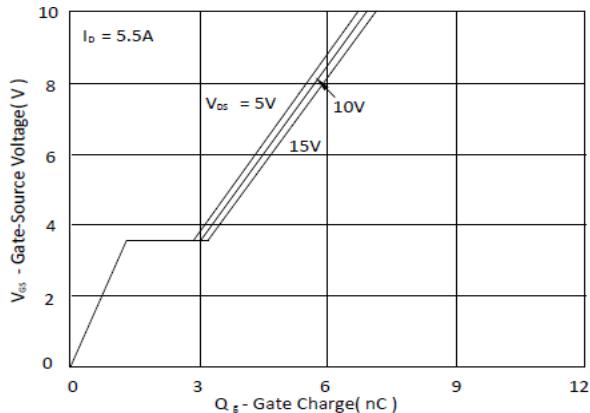


Figure 8. Typical Capacitance vs. Drain-to-Source Voltage

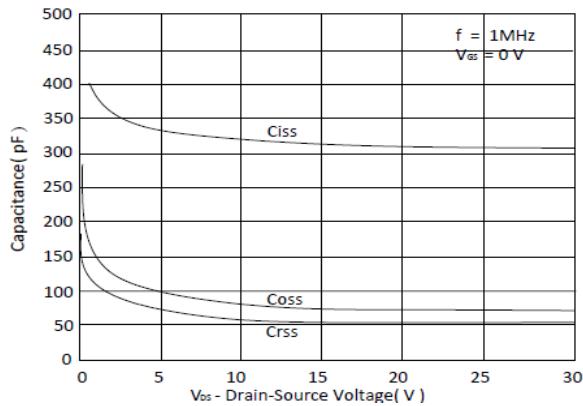


Figure 9. Maximum Safe Operating Area

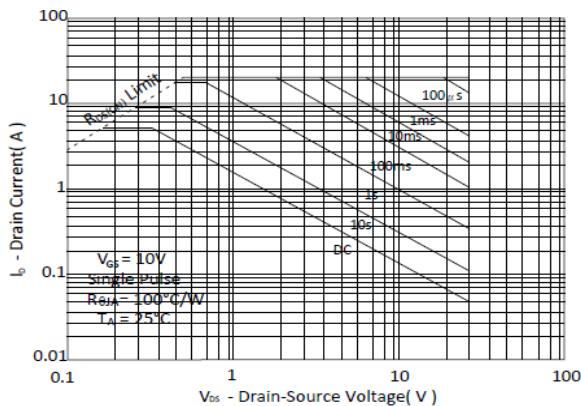


Figure 10. Single Pulse Maximum Power Dissipation






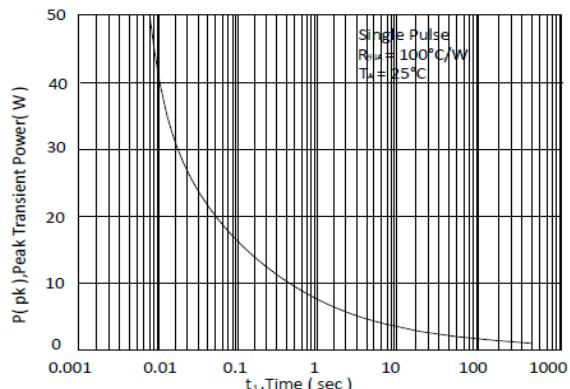



Figure 11. Normalized Maximum Transient Thermal Impedance, Junction-to-Ambient

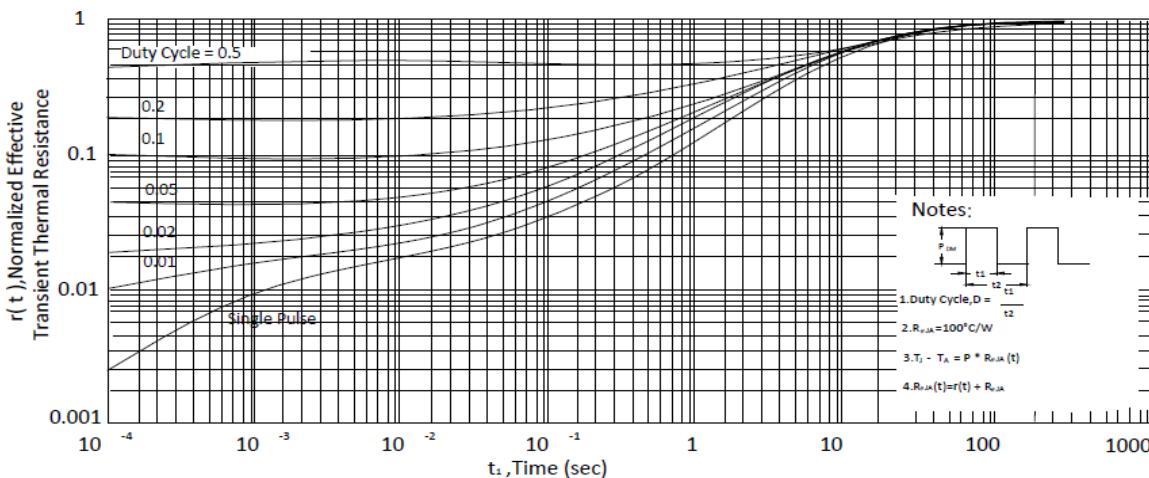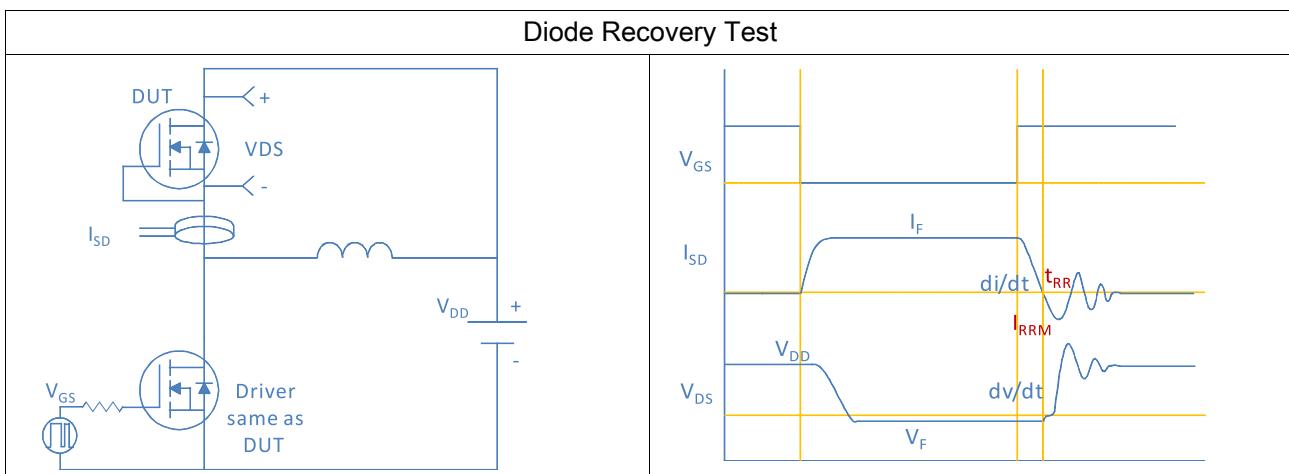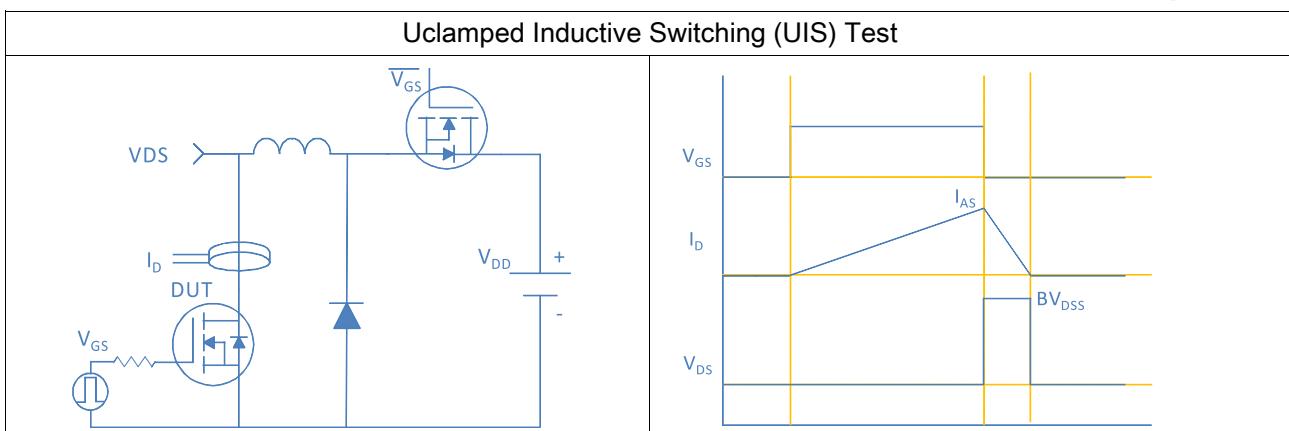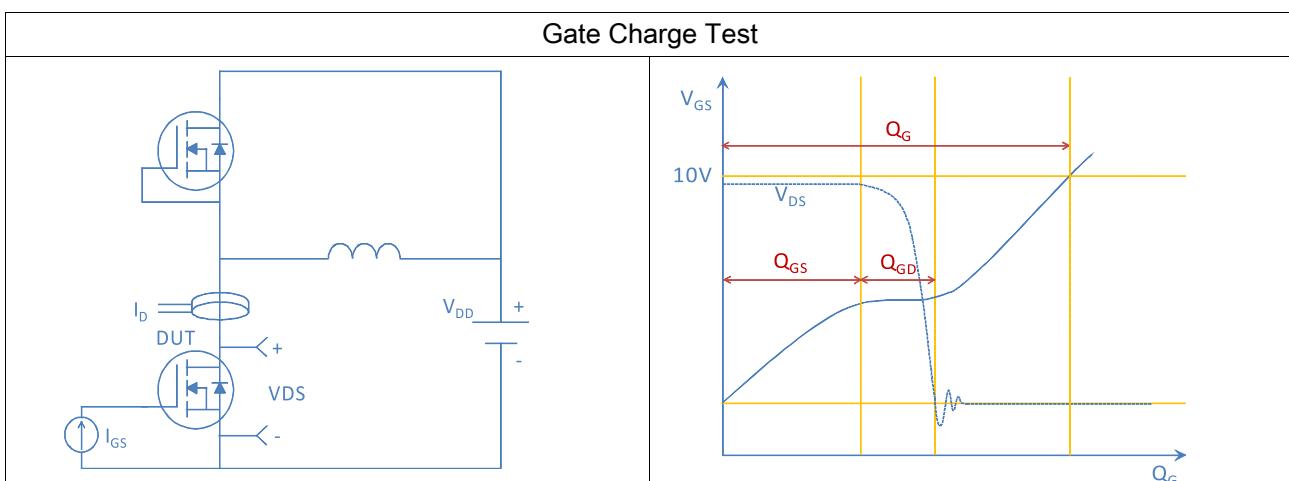

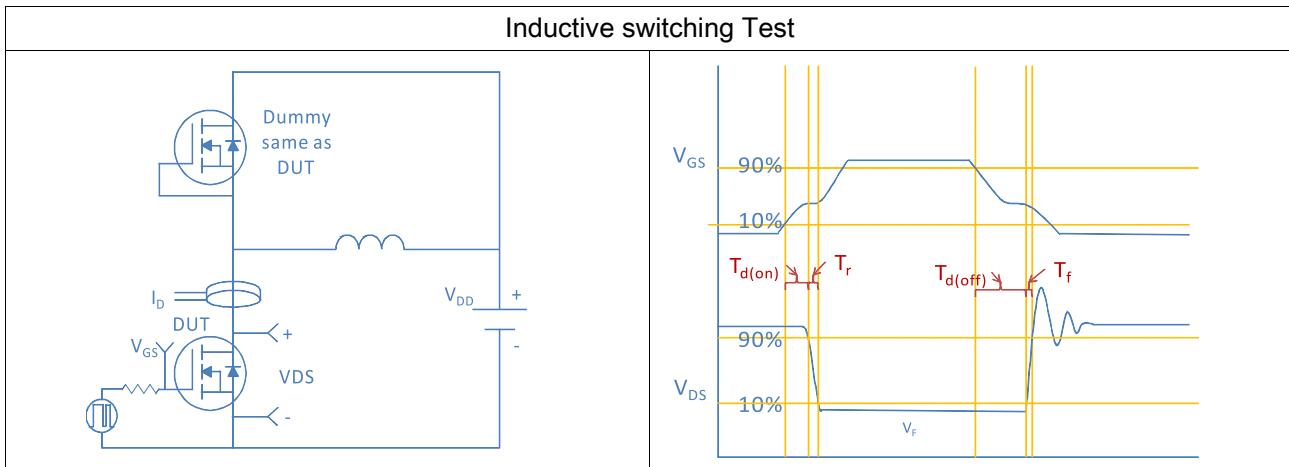

## Package Outline

TSOP-6, 6leads

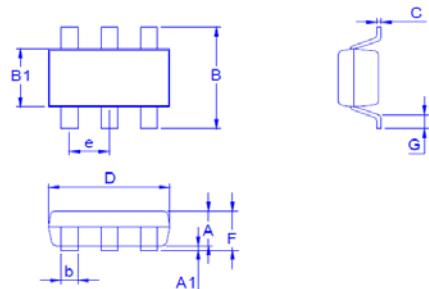

Dimension in mm

Dimension	A	A1	B	B1	b	C	D	e	F	G
Min.	0.85	0	2.50	1.50	0.30	0.08	2.70		0.85	0.20
Typ.	0.95		2.80	1.60	0.40		2.90	0.95		
Max.	1.25	0.15	3.10	1.70	0.50	0.20	3.10		1.40	0.60